KOHLER®

Roughing-In

K-3489, K-3489-RA
CIMARRON™
COMFORT HEIGHT™ TOILET

Product Information

Applicable products:	
Comfort Height toilet - left trip lever	K-3489
Comfort Height toilet - right trip lever	K-3489-RA
ADA compliant (when installed following installation notes).	**ADA**

Fixture:	
Configuration	one-piece, elongated
Water per flush	1.6 gal (6 L) or 1.4 gal (5.3 L)
Passageway	2-1/8″ (5.4 cm)
Water area	11-1/2″ (29.2 cm) x 8-1/2″ (21.6 cm)
Water depth from rim	6-1/8″ (15.5 cm)
Seat post hole centers	5-1/2″ (14 cm)

Included components:	
Seat	K-4636
Tank cover	1036367
Trip lever, left-hand	K-9466-L
Trip lever, right-hand	K-9466-R
Bolt cap accessory pack	1013092
Tank accessory pack	52265

Installation Notes

Install this product according to the installation guide.

Will comply with the American Disabilities Act (ADA) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act, which include the installation of an open front seat.

Section 604 states the required height of the toilet is 17″ (43.2 cm) to 19″ (48.3 cm) from the floor to the top of the seat to meet ADA requirements.
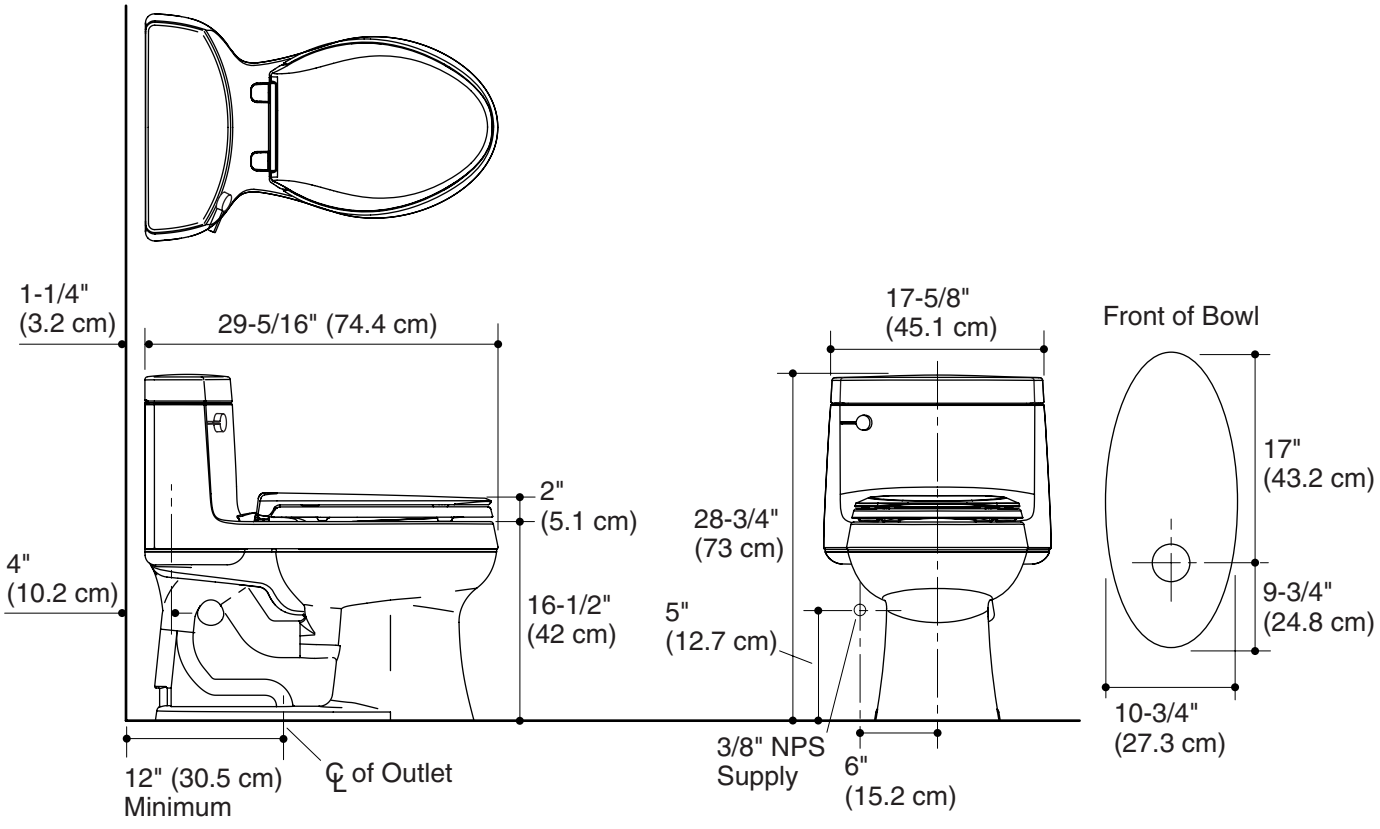
Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2.